



Laboratory flocculator "Flocumatic"

FOR THE DETERMINATION OF THE NECESSARY AGENTS REQUIRED FOR SEDIMENTATION.
DIGITAL ELECTRONIC CONTROL OF SPEED AND TIME FUNCTIONS.

NEW
DESIGN

APPLICATIONS

Optimisation of coagulant additives and poly-electrolytes for surface and residual water treatment.

Evaluation of the efficiency of an absorbent on toxic agents.

FEATURES

Stirring equipment for 4 or 6 places that accommodates beakers up to 1000 ml tall form and 2000 ml squat form.

Stirring speed from 15 to 200 r.p.m.

Silent running.

Adjustable timer from 1 to 999 minutes or continuous operation.


Easily adjusted height over head stir bars made of AISI 304 stainless steel are easily fixed in position.

Two vertical and horizontal adjustable illumination units can be placed in the unit. This adjustable accessory allows the light angle to be varied according to the samples being run. An original Selecta design see accessory part numbers 3000834 and 3000915, 4 and 6 place models that obtain simultaneous front and back lighting.

The main case of the unit is made of epoxy coated steel, with AISI 304 stainless steel supports with anti slip rubber feet.

CONTROL PANEL

1. Digital display showing speed and time in minutes.
2. Indicator showing parameter displayed.
3. Push button selector for speed or time function.
4. Push button increase parameter value.
5. Push button decrease parameter value.
6. Push button start-stop.

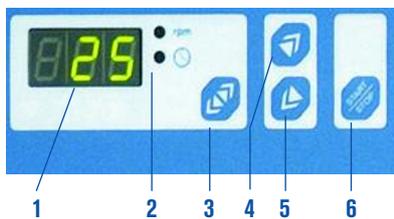

Flocculator "Flocumatic" with horizontal and vertical illumination (6 places).



Flocculator "Flocumatic" with horizontal illumination (4 places).


MODELS

Part No.	No. of places	Speed r.p.m.	Height / Width / Depth (exterior) cm	Illumination power W	Power W	Weight Kg
3000833	4	15 - 200	52 70 23	40	160	24
3000914	6	15 - 200	52 99 23	50	170	36

ACCESSORIES

Illumination units, simultaneous lighting horizontal and vertical.

Part No.	Model part No.	Places
3000834	3000833	4 places.
3000915	3000914	6 places.

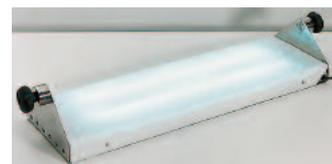

Portable flocculator "Jartest"

FOUR POSITIONS. WITH ILLUMINATION.

FEATURES

Mains voltage or portable connection to a cigarette lighter within a car (12 V DC), for achieving analysis for on site chemical dose measurements for waste water treatment plants.

Variable height over head stirrers made of AISI 304 stainless steel.

Suitable for vessels up to 1 litre capacity.

MODEL

Part No.	Height / Width / Depth (exterior) cm	Power W	Power supply	Weight Kg
5100117	32 25 25	20	220-240 V / 50-60 Hz	4.8

CONTROL PANEL

Illuminated power switch when the illumination element is on.

Speed selector of: 20, 40, 50, 100 and 200 r.p.m.

Timer from 0 to 30 minutes or infinity.



ACCESSORY.

Carrying case.
Part No. 5111005



Rotating Flask Mixer "Reax-20"

STANDARD DIN 38414 PART 4.

APPLICATIONS

Indicates visually the solubility of flocculent substances, sediments, residual water and mud.

MODELS

Part No.	Capacity flasks	Height / Width / Depth (exterior) cm	Power W	Weight Kg	
REAX 20-12	5054124	12 flasks	47 105 52	280	33
REAX 20-8	5054128	8 flasks	47 77 52	280	28
REAX 20-4	5054122	4 flasks	47 49 52	280	23

Comes complete with adapters for 1.5 and 2 litres flasks.

UNE-EN ISO 9001:2000

Heidolph
Research made easy

