

COMECTA Glass Viscometers

VISCOMETER "UBBELOHDE"

ASTM D445 - ASTM D446 - ISO 3104 - ISO 3105.
 Suitable for transparent liquids.
 Complete with calibration certificate.
 Total length 283 mm.
 Permanent amber markings.

ACCESSORY

Viscometers support rack.
 Part No. **1025812**
 Capacity:
 6 viscometers.




Ubbelohde

Part No.	Type	Nominal constant	Viscosity range in cSt
5600001	0	0.001	0.3 to 1
5600002	0C	0.003	0.6 to 3
5600003	0B	0.005	1 to 5
5600004	1	0.01	2 to 10
5600005	1C	0.03	6 to 30
5600006	1B	0.05	10 to 50
5600007	2	0.1	20 to 100
5600008	2C	0.3	60 to 300
5600009	2B	0.5	100 to 500
5600010	3	1.0	200 to 1000
5600011	3C	3.0	600 to 3000
5600012	3B	5.0	1000 to 5000
5600013	4	10.0	2000 to 10000
5600014	4C	30.0	6000 to 30000

VISCOMETERS "CANNON-FENSKE" TRANSPARENT

ASTM D445 - ASTM D446 - ISO 3104 - ISO 3105 - IP 71.
 Suitable for transparent liquids.
 Complete with calibration certificate.
 Constant at 40 °C to 100 °C.
 Total length 250 mm.
 Permanent amber markings.

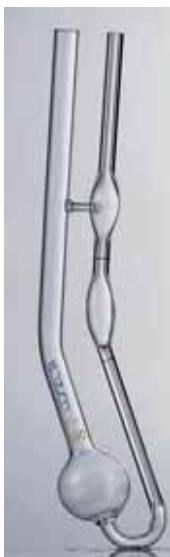

Transparent

Part No.	Serie	Nominal constant	Viscosity range in cSt
5600050	25	0,002	0,4 a 1,6
5600051	50	0,004	0,8 a 3,2
5600052	75	0,008	1,6 a 6,4
5600053	100	0,015	3 a 15
5600054	150	0,035	7 a 35
5600055	200	0,1	20 a 100
5600056	300	0,25	50 a 200
5600057	350	0,5	100 a 500
5600058	400	1,2	240 a 1200
5600059	450	2,5	500 a 2500
5600060	500	8	1600 a 8000
5600061	600	20	4000 a 20000

VISCOMETERS "CANNON-FENSKE" OPAQUE

ASTM D445 - ASTM D446 - ISO 3104 - ISO 3105.
 Suitable for opaque and transparent liquids.
 Complete with calibration certificate.
 Constant at 40 °C and 100 °C.
 Total length 295 mm.
 Permanent amber markings.



Opaque

Part No.	Serie	Nominal constant	Viscosity range in cSt
5600065	25	0,002	0,4 a 1,6
5600066	50	0,004	0,8 a 3,2
5600067	75	0,008	1,6 a 6,4
5600068	100	0,015	3 a 15
5600069	150	0,035	7 a 35
5600070	200	0,1	20 a 100
5600071	300	0,25	50 a 200
5600072	350	0,5	100 a 500
5600073	400	1,2	240 a 1200
5600074	450	2,5	500 a 2500
5600075	500	8	1600 a 8000
5600076	600	20	4000 a 20000